


INSTALLATION MANUAL


- WALL-MOUNTED BASIN FAUCET

CAUTION

Before installing the basin faucet, carefully read this manual, as well as all the warnings and usage recommendations included on the enclosed warranty card. Incorrect installation may damage the faucet components and will result in the loss of the product warranty coverage.

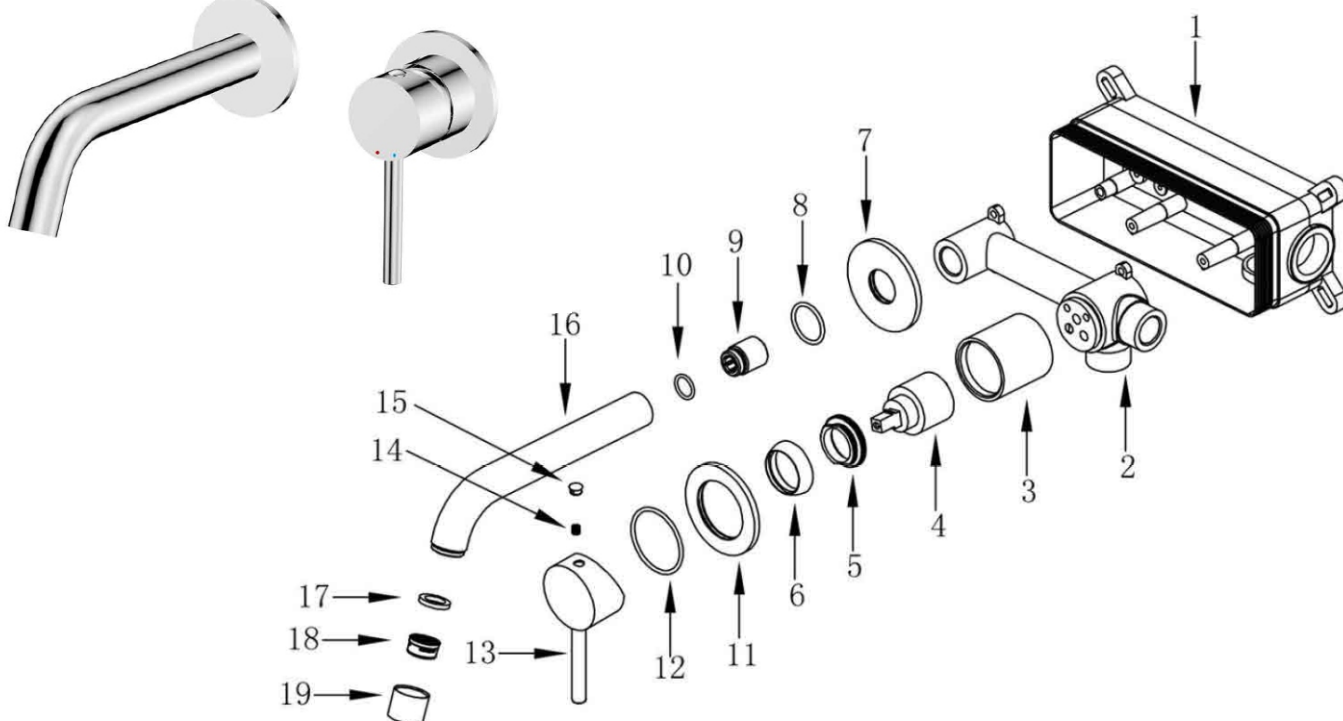

Dimension diagram [mm / inches]:

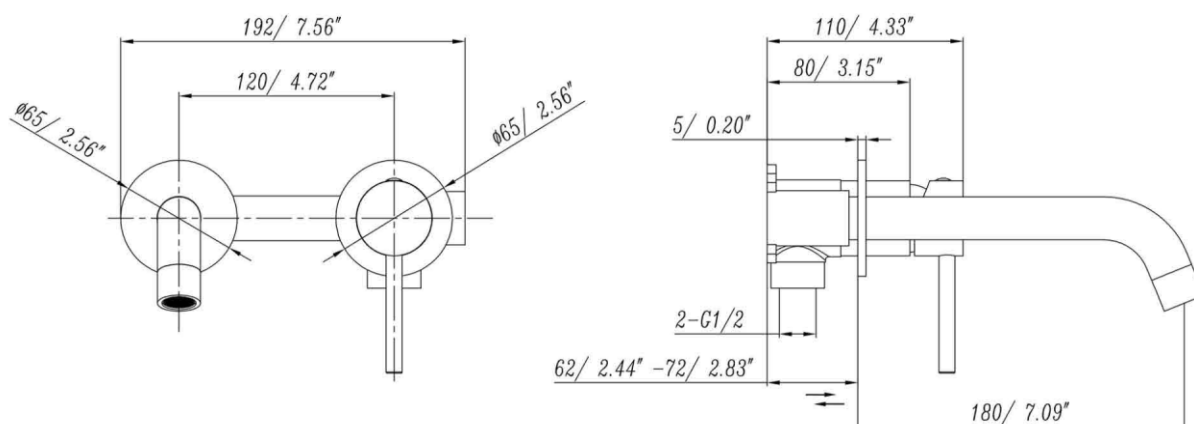

GENERAL INFORMATION AND RECOMMENDATIONS ON USE AND INSTALLATION



1. Before installing the wall-mounted basin faucet, check the integrity of the product and whether it matches the order. If the faucet has missing parts, defects or damage (for example, caused during transport), it must not be installed.
2. The wall-mounted basin faucet must be used according to its intended purpose. The faucets are designed exclusively for domestic use; any other use is considered inappropriate. This faucet must not be used in commercial environments.
3. Do not use it in rooms where the air temperature drops below 4 °C.
4. Before installing the faucet, properly flush the water system to prevent contamination of its components (for example, by sediment, limescale or rust particles), which could cause damage.
5. When installing the faucet, it is essential to ensure easy access to the components that wear during normal use of the product, such as cartridges, switches, connection hoses, etc.
6. The faucets, especially all their components (such as the aerator, among others), must be cleaned periodically with clean water or mild detergents, and then dried with a soft cloth to prevent limescale buildup. Do not use caustic or abrasive substances or those containing particles, as they could damage the surface of the faucet; this includes any product not designed for this type of item.
7. To assemble the wall-mounted basin faucet, use only wrenches with smooth, snag-free jaw surfaces, to avoid damaging its components.

INSTALLATION OF WALL-MOUNTED BASIN FAUCET:


1. When placing the main faucet body on the wall, do not remove the protective cover from the faucet, as this could cause scratches or other damage to the internal components. The cover should only be removed after fixing the faucet body to the wall (step 3).
2. Make a hole in the wall with a minimum width of 226 mm, minimum height of 101 mm and depth of 62 to 72 mm; this hole will conceal the hidden part of the faucet. At this point, the hot and cold water outlets will be located.

CAUTION: The depth range includes the thickness of the tiles used on the wall. When determining the depth of the hole, it is necessary to take into account the thickness of the tiles to be installed on the selected wall.


3. Drill holes at the marked points (use a 6 mm drill bit), then mount the main faucet body using the included installation kit. Remove the plastic protective cover. Then, connect the hot and cold water outlets to the faucet body, paying attention to the hot and cold water connection location ? the faucet body has suitable markings to identify it. To verify the correctness of the assembly of all connections and their watertightness to check, let the water flow for 1 to 2 minutes.

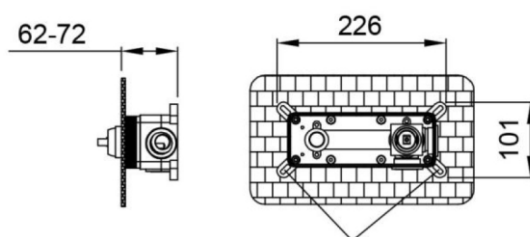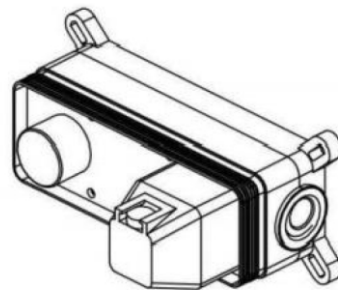


Mark the location of the mounting screws

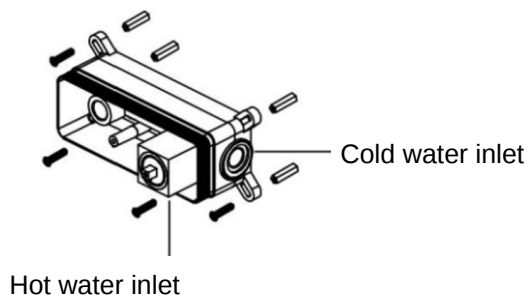


4. As shown in the figure, when preparing to drill the tile, the diameter of the right hole is 45 mm, the diameter of the left hole is 25 mm and the distance between centres is 120 mm.

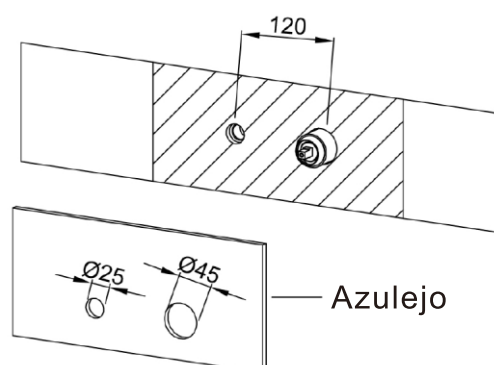

5. Wrap teflon tape around the thread of the faucet pin (G1/2), then tighten the pin onto the water outlet of the faucet body. Then, install the decorative nut (or decorative rosette) onto the faucet body, mount the spout on the pin and the faucet handle onto the cartridge; then, tighten both elements with the included hex key and place the masking caps over the screws.

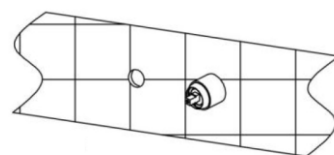

6. As shown in the figure, the installation is now complete.

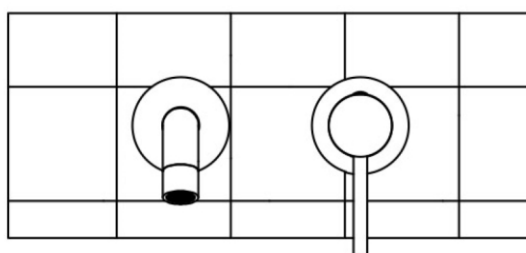

CAUTION

The installation of the washbasin faucet should only be carried out by a specialized contractor. Installation of the washbasin faucet by unauthorized persons may result in damage to the product or other bathroom equipment such as washbasin, countertop, etc.